




Roof Renewal System Details

Steel Pedestal or Pipe Stand

1 Deck	2 Existing Membrane
3 New ASC Roof Renewal System Membrane	4 3 Course Installation ASC 7 Elastomagic Cement and ASC F Polyester Fabric
5 Steel Pedestal or Pipe Stand	

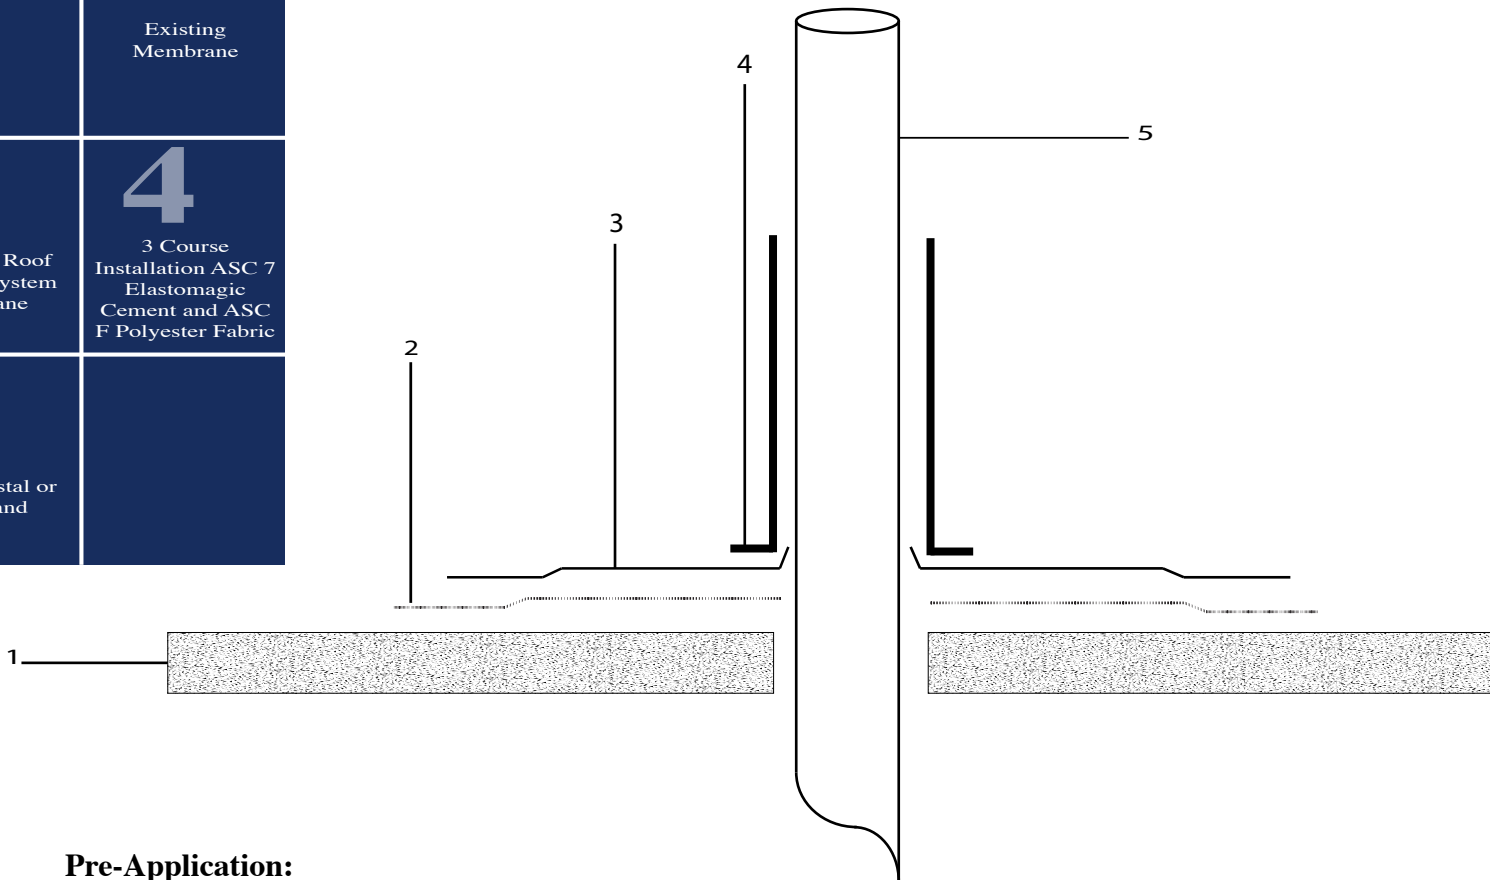

Pre-Application:

Surfaces must be structurally sound, cleaned, dried, and free of moisture on and beneath the surface. Remove all dust, dirt, oil, loose granules and any other foreign contaminants. Remove any other loose, flaking or existing waterproof coatings, which may affect the adhesion. Rusty metal should be cleaned with a wire brush.

Application:

In areas between steel pedestal or pipe stand - Apply first coat of ASC 7 Elastomagic Cement with brush or trowel at 1/8-1/4 inch thickness. Immediately following embed ASC F Polyester Fabric. Lightly brush the polyester fabric into ASC 7 to achieve full saturation, smoothing out wrinkles or voids. Apply second coat of ASC 7 Elastomagic Cement, ensuring the polyester fabric is completely covered around the steel pedestal / pipe stand detail (ASC 3 Course Method).

As needed repeat procedure between Steel Pedestal / Pipe Stand and Existing Roof Deck.

