




Roof Renewal System Details

Wall Termination- Reglet or Counter Flashing

1 Deck	2 Existing Membrane
3 New ASC Roof Renewal System Membrane	4 3 Course Installation ASC 7 Elastomagic Cement and ASC F Polyester Fabric

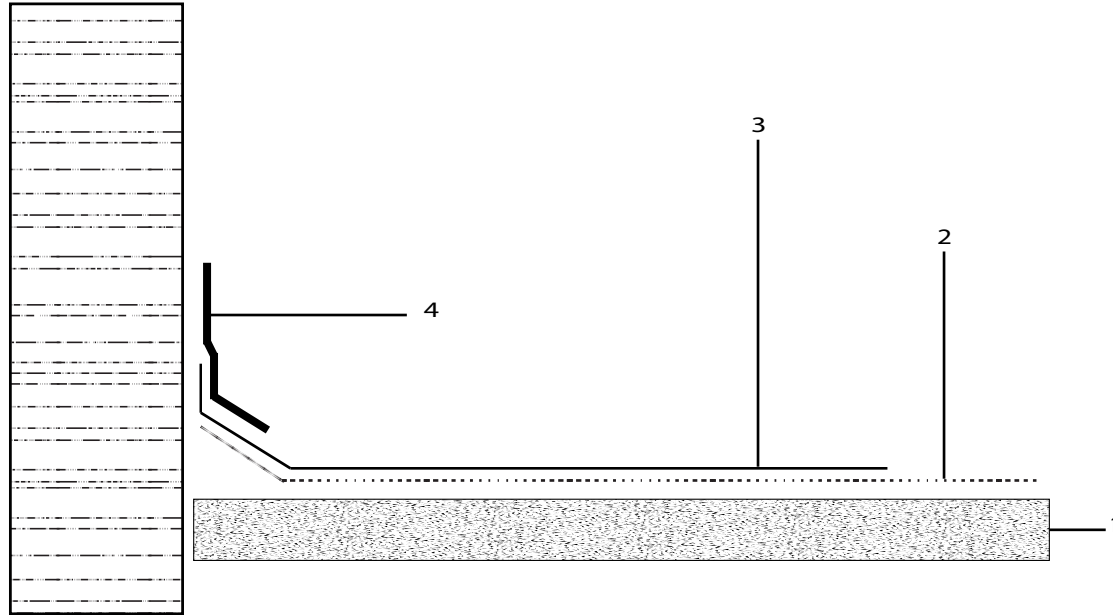

Pre-Application:

Surfaces must be structurally sound, cleaned, dried, and free of moisture on and beneath the surface. Remove all dust, dirt, oil, loose granules and any other foreign contaminants. Remove any other loose, flaking or existing waterproof coatings, which may affect the adhesion. Rusted metal should be cleaned with a wire brush.

Application:

In the area between new roof and existing Reglet or Counter Flashing Metal- Apply first coat of ASC 7 Elastomagic Cement with brush or trowel at 1/8-1/4 inch thickness. Immediately following embed ASC F Polyester Fabric. Lightly brush the polyester fabric into ASC 7 to achieve full saturation, smoothing out wrinkles or voids. Apply second coat of ASC 7 Elastomagic Cement (3 Course Method).

